

## X300

2-channel D/A (0 ~ 4.095V)

### Features

- 2-channel Non-Isolation Analog Output
- 12-bit output (0 ~ 4.095 VDC)



### Introduction

The X-board series are for I-7188XA, I-7188XB, I-7188XC, I-7188XG, I-7188EG, I-7188EX and uPAC-7186EX Series (uPAC-7186EX, uPAC-7186PEX, uPAC-7186EG, uPAC-7186EX-FD, uPAC-7186EX-SM).


Above one  $\mu$ PAC can plug only one X-board.

X300 is a 2-channel Non-Isolation Analog Output X-board for I-7188XC.

### Specifications

Analog Output	
Channels	2
Type	Voltage
Range	0 ~ 4.095 V
Resolution	12-bit
Voltage Output Capability	5 mA
Isolation	None
Mechanical	
Dimensions (mm)	38 mm x 64 mm
Environmental	
Operating Temperature	-25 ~ +75 °C
Storage Temperature	-40 ~ +80 °C
Humidity	5 ~ 90 %, Non-condensing

### Pin Assignments

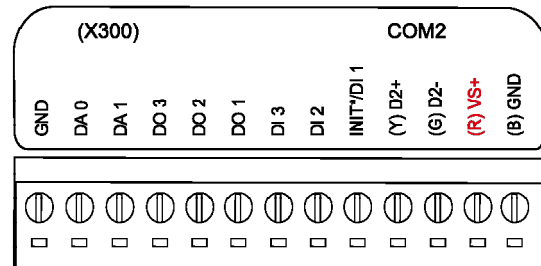

### Ordering Information

<b>X300</b>	2-channel D/A (0 ~ 4.095V)
-------------	----------------------------