



I-8041

32-ch Isolated DO Module



I-8041-G

■ Features

- 32-channel Open Collector Output
- Sink Type Digital Output
- 3750 Vdc Intra-module Isolation
- Each Digital channel has its own status LED



■ Introduction

The I-8041 module offers 32 Digital Output channels, each of which features Photocouple isolation. The I-8041 supports Sink Type Output using an open collector. The I-8041 includes 32 LED indicators that can be used to monitor the status of the Digital Output channels. ± 4 kV ESD protection and 3750 VDC intra-module isolation is provided as standard. The I-8041 can be paired with a daughterboard, such as the DN-37-381-A CR for easy wiring, or the DN-8K32R for Relay Output.



I-8040, I-8041, I-8042, I-87040, I-87041 with
DN-37-381-A & DB37 Male to Female Cable
(Optional)



I-8040, I-8041, I-8042, I-87040, I-87041 with
DN-37-A & DB37 Male to Female Cable
(Optional)



I-8041 and I-87041 with
DN-8K32R & DB37 Male to Female Cable
(Optional)


■ System Specifications

LED Indicators/Display	
System LED Indicator	1 LED as Power Indicator
I/O LED Indicator	32 LEDs as Digital Output Indicators
Isolation	
Intra-module Isolation, Field-to-Logic	3750 Vdc
EMS Protection	
ESD (IEC 61000-4-2)	± 4 kV Contact for each Terminal
Power	
Power Consumption	1.5 W max.
Mechanical	
Dimensions (W x L x H)	31 mm x 114 mm x 66 mm
Environment	
Operating Temperature	-25 ~ +75 °C
Storage Temperature	-40 ~ +85 °C
Humidity	10 ~ 90% RH, Non-condensing


■ I/O Specifications

Digital Output	
Channels	32
Type	Isolated Open Collector
Sink/Source (NPN/ PNP)	Sink
Load Voltage	+5 ~ +30 Vdc
Max. Load Current	100 mA/Channel

Internal I/O Structure

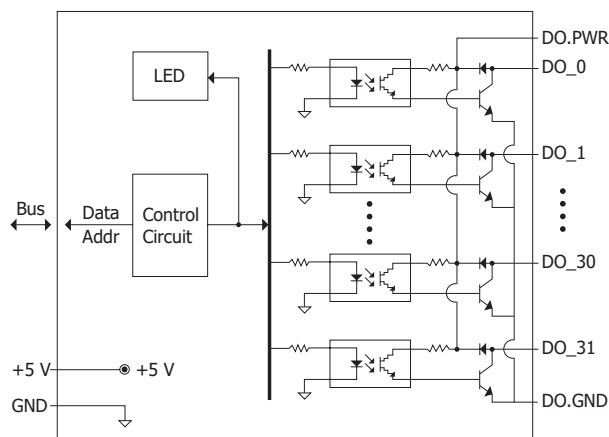

Dimensions (Units: mm)

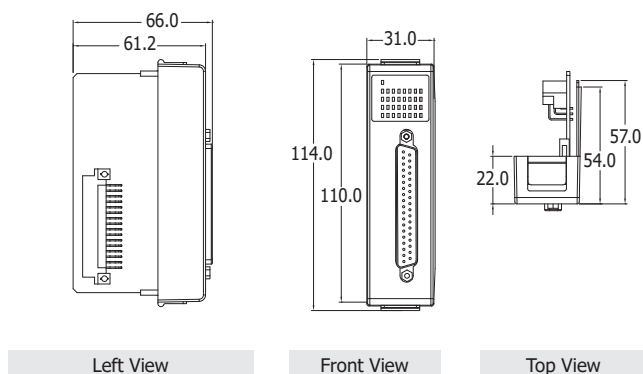

Wire Connections

Output Type	ON State LED ON Readback as 1	OFF State LED OFF Readback as 0
	Relay ON	Relay OFF
Drive Relay		
Resistance Load		

Pin Assignments

Pin Assignment	Terminal	No.	Pin Assignment
DO.PWR	19	37	DO.PWR
DO.GND	18	36	DO.GND
DO.GND	17	35	DO_31
DO_15	16	34	DO_30
DO_14	15	33	DO_29
DO_13	14	32	DO_28
DO_12	13	31	DO_27
DO_11	12	30	DO_26
DO_10	11	29	DO_25
DO_9	10	28	DO_24
DO_8	09	27	DO_23
DO_7	08	26	DO_22
DO_6	07	25	DO_21
DO_5	06	24	DO_20
DO_4	05	23	DO_19
DO_3	04	22	DO_18
DO_2	03	21	DO_17
DO_1	02	20	DO_16
DO_0	01		

37-pin Male D-Sub Connector

Ordering Information

I-8041 CR	32-ch Isolated DO (Sink, NPN, 5~30VDC) Module (Blue Cover) (RoHS) Includes CA-4002F (DB37 connector Female with plastic cover)
I-8041-G CR	32-ch Isolated DO (Sink, NPN, 5~30VDC) Module (Gray Cover) (RoHS) Includes CA-4002F (DB37 connector Female with plastic cover)

Accessories

	DN-8K32R CR	32-channel Relay Output Board (RoHS) Include: CA-3705A (DB37 Male to Female Cable, 90°, 0.5 M)
	DN-37-A CR	Female DB37 to Screw Terminal Board (Pitch= 5.08 mm) with DIN-rail Mounting (RoHS) Include: CA-3710A (DB37 Male to Female Cable, 90°, 1 M)
	DN-37-381-A CR	Female DB37 to Screw Terminal Board (Pitch=3.81 mm) with DIN-rail Mounting (RoHS) Include: CA-3710A (DB37 Male to Female Cable, 90°, 1 M)
	CA-3705A CR CA-3710A CR CA-3715A CR	DB37 Male to Female Cable, 90°, 0.5 M/1 M/1.5 M (RoHS)
	CA-3710AM CR CA-3720AM CR CA-3730AM CR CA-3750AM CR CA-37100AM CR	DB37 Male to Female, with Molded Cable, 45°, 1 M/2 M/3 M/5 M/10 M (RoHS)