

## X500

1-Port RS-232 (9-Pin)

### Features

- 1-Port Non-Isolation 9-wire RS-232



### Introduction

The X-board series are for I-7188XA, I-7188XB, I-7188XC, I-7188XG, I-7188EG, I-7188EX and uPAC-7186EX Series (uPAC-7186EX, uPAC-7186PEX, uPAC-7186EG, uPAC-7186EX-FD, uPAC-7186EX-SM).


Above one  $\mu$ PAC can plug only one X-board.

X500 is a 1-Port Non-Isolation 9-wire RS-232 X-board for I-7188XC. (Without Case)

### Specifications

COM Ports	
Ports	1 x 9-wire RS-232 (TxD, RxD, RTS, CTS, DSR, DTR, DCD, RI, GND without case, for I-7188XA/I-7188XC) 1 x 3-wire RS-232 (TxD, RxD, GND with case, for I-7188XC)
Baud Rate	115200 bps Max. 1200 ~ 115200 bps 10 k, 20 k, 50 k, 125 k, 250 kbps, 500 k, 800 k, 1M 125 k, 250 k, 500 k
FIFO Size	16 bytes
Power	
Consumption	0.4 W
Mechanical	
Dimensions (mm)	38 mm x 64 mm
Environmental	
Operating Temperature	-25 ~ +75 °C
Storage Temperature	-40 ~ +80 °C
Humidity	5 ~ 90 %, Non-condensing

### Pin Assignments

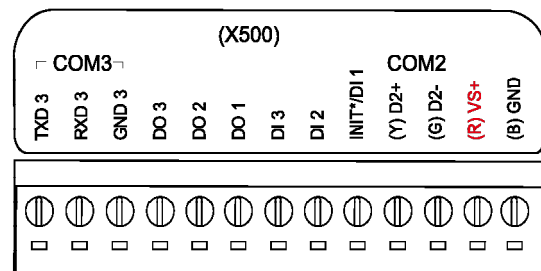

### Ordering Information

<b>X500 CR</b>	1-Port RS-232 (9-Pin) (RoHS)
----------------	------------------------------