

## XW506

6-port Non-Isolated RS-232 Expansion Board

### Features

- 6-port Non-Isolation 3-wire RS-232
- Baud rates from 1,200 up to 115,200 bps
- 16C550 compatible
- Internal 16-byte Hardware FIFO for each Port



### Introduction

The XW-board series are for uPAC-5000, LP-51xx, and WP-51xx series.


One PAC can only plug only one XW-board.

XW506 is a 6-port Non-Isolation RS-232 XW-board.

### Specifications

COM Ports	
Ports	RS-232 x 6
Parity	None, Even, Odd, Mark, Space
Data Bit	5, 6, 7, 8
Stop Bit	1, 1.5, 2
FIFO Size	16 bytes
Power	
Consumption	0.2 W Max.
Mechanical	
Dimensions (mm)	66 mm x 82 mm x 13 mm (W x L x H)
Environmental	
Operating Temperature	-25 ~ +75 °C
Storage Temperature	-30 °C ~ +75 °C
Humidity	10 ~ 95% RH, Non-condensing

### Pin Assignments

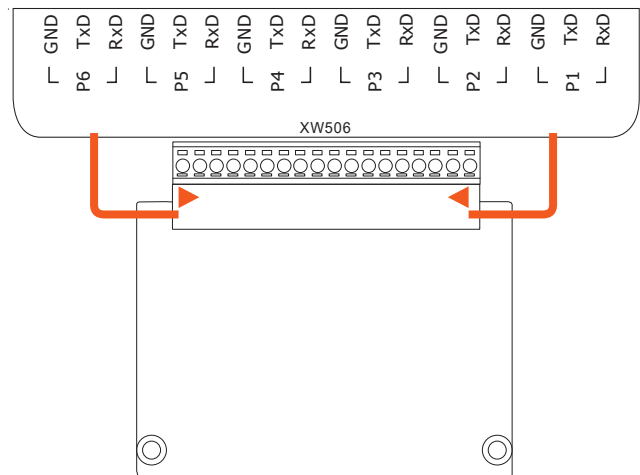

### Ordering Information

<b>XW506 CR</b>	6-port Non-Isolated RS-232 Expansion Board (RoHS)
-----------------	---